


NZ36B NETZERO PRIMEFIRE

AUTOMATIC ETHANOL BURNER WITH BEV TECHNOLOGY®

AA-11-04744

AUTOMATIC BURNER

The automatic burner with patented BEV Technology® is the most advanced product in the industry, ensuring the cleanest burning process without any smoke, smell or ash. The flame is produced by combusting ethanol vapors and has no direct contact with the liquid fuel.

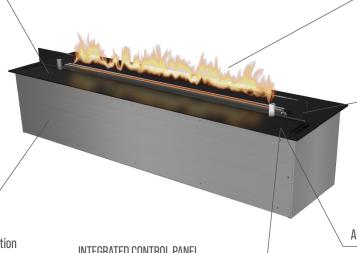

BEST BUILD QUALITY

NetZero burners have passed extensive tests carried out by the leading certification institutes. They're manufactured according to UL standards and are O-TL certified meeting the most demanding safety and quality requirements.

OPTIONAL REMOTE CONTROL

Comfort at your fingertips. Control the fire from the couch through a convenient remote.



INTEGRATED CONTROL PANEL

This NetZero Burner has an intuitive control panel with an integrated inlet for automatic refuelling.

FLAME CONTROL

Have control over the fire and take advantage of the 2-stage flame height regulation.

GLASS BARRIER

The dedicated tempered glass panel covers and stabilizes the flame.

AUTOMATIC REFILLING SYSTEM

The automatic pump communicates with the device, delivering the necessary amount of fuel. There is no risk of overfilling the tank or spillage.

AVAILABLE OPTIONS Choose one of these packages to add design features that enhance and customize the NetZero Fire experience.



PREMIUM LED FLOOR

Upgrade your fire feature with an array of beautiful LED lights that illuminate the media and complement your flames.



CLASSIC FLOOR

Create a look that's truly yours by adding decorative media such as glass, rocks and marbles.



NZ36B NETZERO PRIMEFIRE

AUTOMATIC ETHANOL BURNER WITH BEV TECHNOLOGY®

AA-11-04744

BURNER SPECIFICATIONS


Fuel Tank Capacity	0.5 gallons			
Burn Time	3 - 6.5 hours			
Heat Output	7,000 - 15,000 BTU			
Fuel Type	Bioethanol 86 - 96.6%			
Weight	27 lbs			
Minimum Room Cubature	3,000 ft ³			
Flue	Not required			
Air Change Rate	1 space per volume per hour			
Electrical Connection	115V, 60HZ, min. 15A dedicated breaker			
Finish	Black powder coating			
Application	For indoor use only			
Flame Height Regulation	2 stages			

CLEARANCES & CAVITY MEASUREMENTS - SITE-BUILT ENCLOSURES


A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)	H (in)
9"	12"	26-3/4"	35"	2"	8"	16"	36"


BURNER DIMENSIONS

For installation specifications and required clearances to combustible materials, refer to the installation manual.

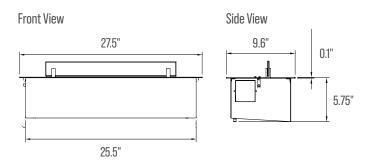

Top View



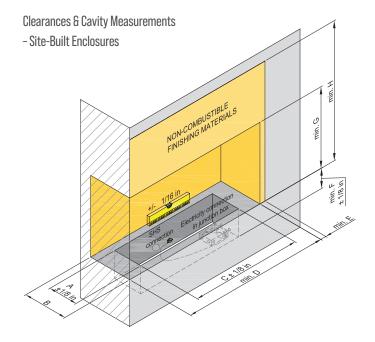

Manufactured to UL Standards | 0-TL Certified | 0-TL

