

NZ36F NETZERO RIGHT-CORNER FIREBOX AA-11-04776

FOR NZ36B PRIMEFIRE AUTOMATIC ETHANOL BURNER (not included)

RIGHT-CORNER FIREBOX

A firebox with two open sides for even more visible flames. Installed in the end of the wall, it creates a natural draw into the room.

PROTECTIVE DEFLECTOR

With the attached deflector you can cover the fire feature housing with combustible materials.

GLASS BARRIER

The dedicated tempered glass panel covers and stabilizes the flame.

REMOTE CONTROL

Comfort at your fingertips. Control the fire from the couch through a convenient remote.



ZERO CLEARANCE

NetZero Fire fireboxes are designed to provide the required clearances to combustible framing for complete design flexibility.



INTEGRATED CONTROL PANEL

This NetZero Burner has an intuitive control panel with an integrated inlet for automatic refuelling.

BEST BUILD OUALITY

NetZero burners and fireboxes have passed extensive tests carried out by the leading certification institutes. They're manufactured according to UL standards and are 0-TL certified – meeting the most demanding safety and quality requirements.

AUTOMATIC BURNER

The automatic burner with patented BEV Technology® is the most advanced product in the industry, ensuring the cleanest burning process without any smoke, smell or ash. The flame is produced by combusting ethanol vapors and has no direct contact with the liquid fuel.

AUTOMATIC REFILLING SYSTEM

The automatic pump communicates with the device, delivering the necessary amount of fuel. There is no risk of overfilling the tank or spillage.

AVAILABLE OPTIONS Choose one of these packages to add design features that enhance and customize the NetZero Fire experience.



PREMIUM LED FLOOR

Upgrade your fire feature with an array of beautiful LED lights that illuminate the media and complement your flames.



CLASSIC FLOOR

Create a look that's truly yours by adding decorative media such as glass, rocks and marbles.



NZ36F NETZERO RIGHT-CORNER FIREBOX AA-11-04776

FOR NZ36B PRIMEFIRE AUTOMATIC ETHANOL BURNER (not included)

BURNER SPECIFICATIONS

Fuel Tank Capacity	0.5 gallons		
Burn Time	3 - 6.5 hours		
Heat Output	7,000 - 15,000 BTU		
Fuel Type	Bioethanol 86 - 96.6%		
Burner Weight	27 lbs		
Minimum Room Cubature	3,000 ft ³		
Flue	Not required		
Air Change Rate	1 space per volume per hour		
Electrical Connection	115V, 60HZ, min. 15A dedicated breaker		
Finish	Black powder coating		
Application	For indoor use only		
Flame Height Regulation	2 stages		


FRAMING DIMENSIONS

W	W1 min	W2 max	D	D1 max	Н	H1 min
(in)	(in)	(in)	(in)	(in)	(in)	(in)
38"	26"	6"	17-1/2"	2"	27-1/2"	9"


FIREBOX DIMENSIONS

For installation specifications and required clearances to combustible materials, refer to the installation manual.


Front View




Side View



Top View



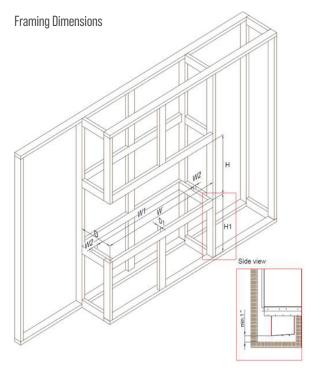

Manufactured to UL Standards | O-TL Certified | O-TL



NETZEROFIRE.COM