

• NetZero Media Tray Installation Instructions

AA-11-05165 - NZPF36B Media Tray

AA-11-05173 - NZ40B Media Tray


AA-11-04929 - NZ48B Media Tray

AA-11-05175 - NZ60B Media Tray

AA-11-05179 - NZ72B Media Tray

AA-11-05276 – NZ90B Media Tray

AA-11-05277 – NZ108B Media Tray

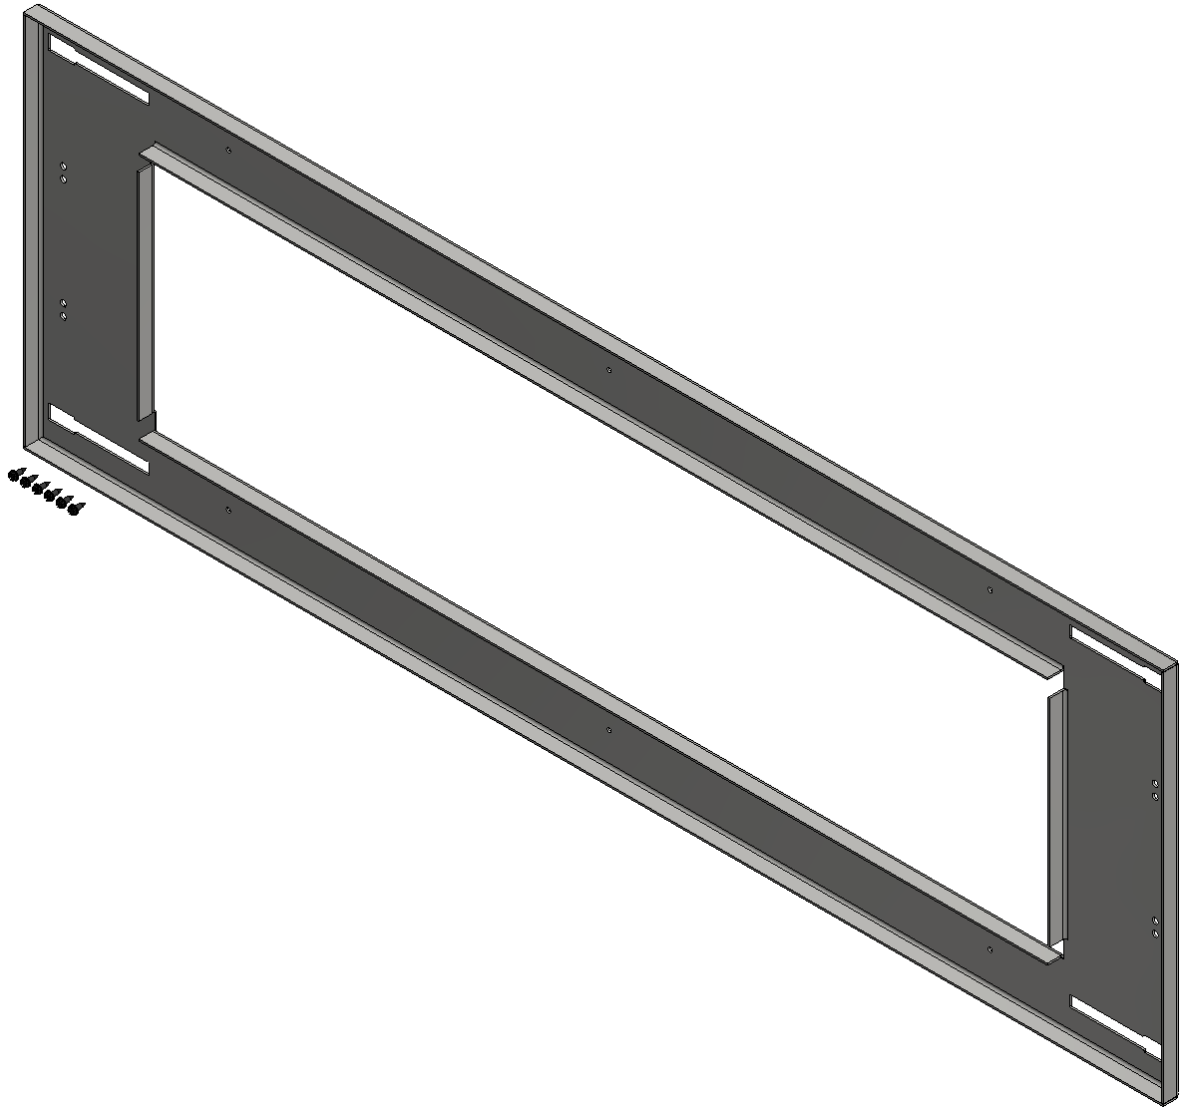


REQUIRED TOOLS

Drill with 1/4" nut driver


INSTALLING INTO THE FIREBOX


- 1) If the burner is currently installed, start by removing the burner from the firebox along with any glass that may be installed.
- 2) Place the media tray into the firebox and align the cutouts and holes on the right side of the firebox to center the media tray in the firebox. The media tray is the same left to right so the orientation that it is placed in the firebox is not important.
- 3) Secure the screws provided to the floor of the firebox. There are no pilot holes in the firebox so ensure the media tray is centered before securing the screws.
- 4) Place the burner back into the firebox along with any glass pieces that were removed.
- 5) Lastly, cover the media tray with the media of your choice.

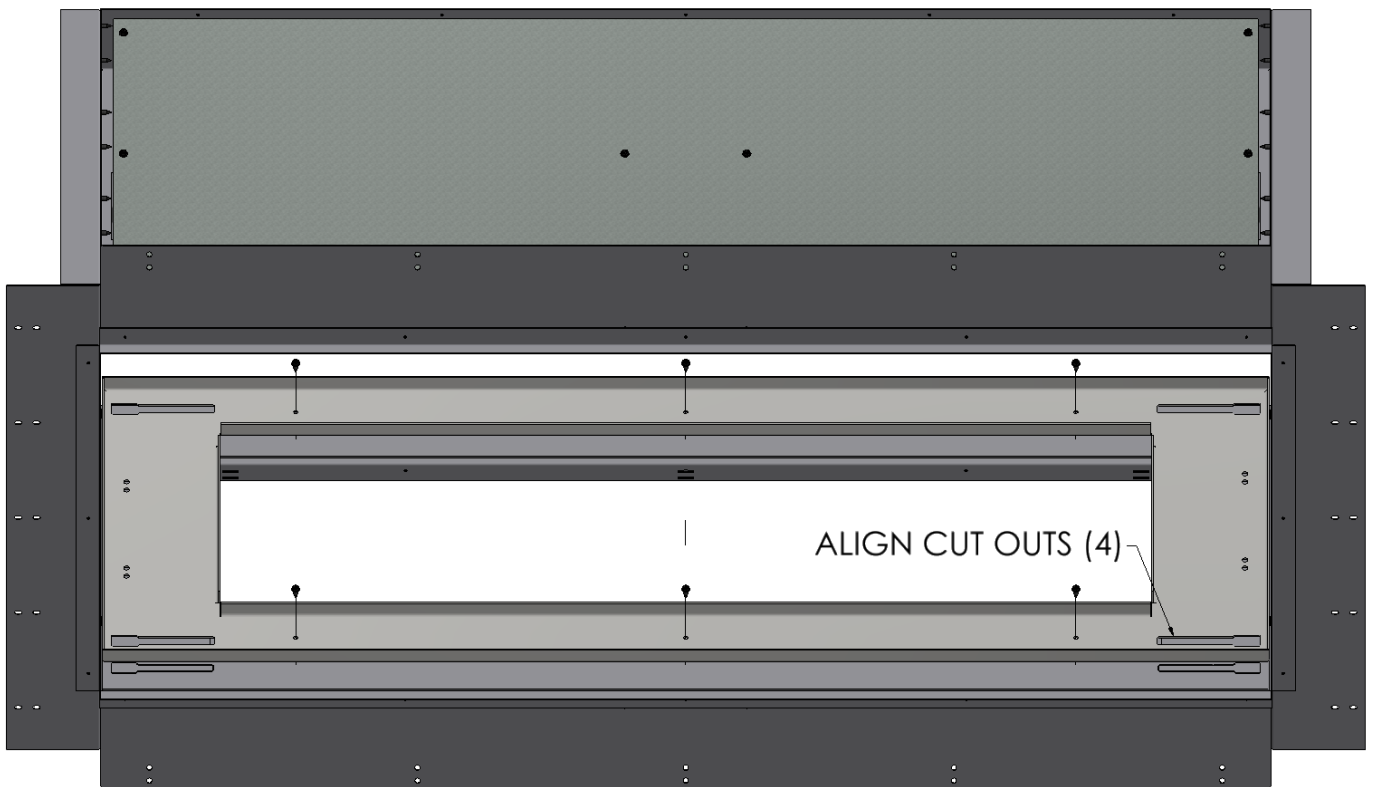

INSTALLING INTO SELF CONSTRUCTED CAVITY

If you are installing into a self constructed cavity follow the dimensions for framing the cavity for your burner size below. The Media Tray will work in conjunction with these dimensions to form a clean finished look and install directly on top. After the Media Tray is secured the burner can be installed.

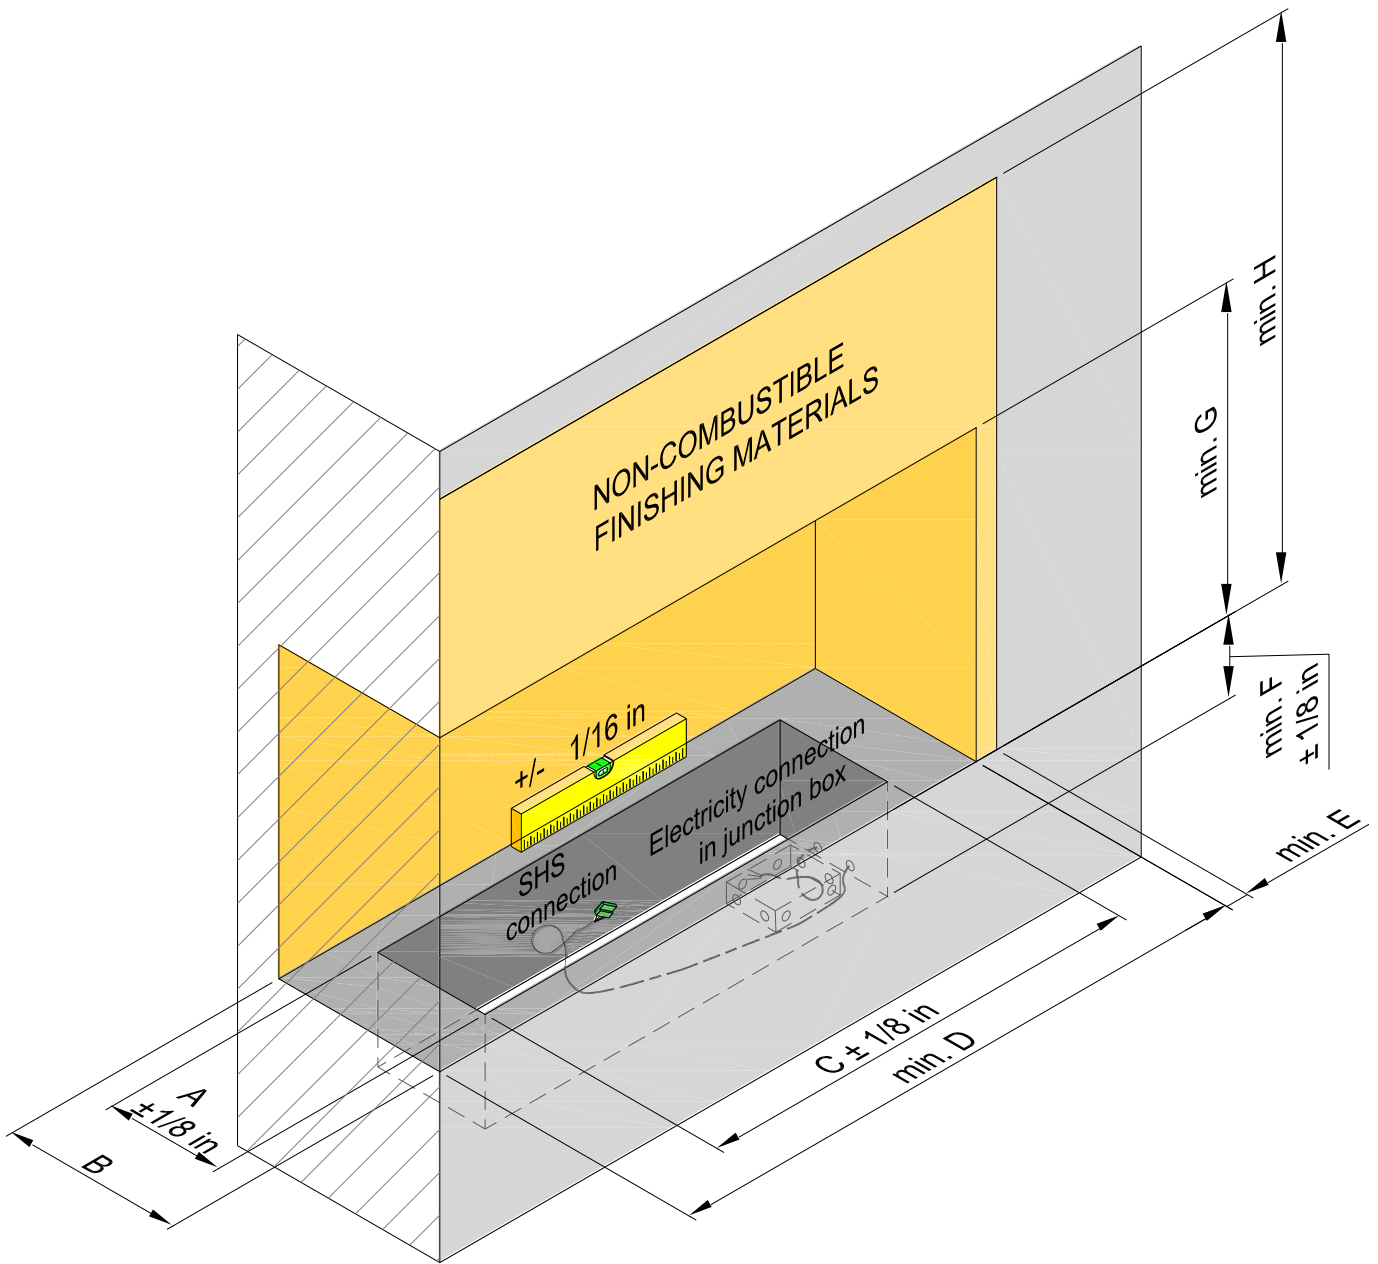

Measurements											
	Burner Model	Electricity connection	SHS connection	A [in]	B [in]	C [in]	D [in]	E [in]	F [in]	G [in]	H [in]
	NZPF36B	115V, 60Hz, min. 15A	4x0.25mm ² AWG 23	9"	16"	26 3/4"	36"	2"	14"	20"	36"
	NZ40B			30 1/2"		40"					
	NZ48B			38 3/8"		48"					
	NZ60B			46 1/4"		60"					
	NZ72B	58"	72"								
	NZ90B	115V, 60 Hz, min. 20A	77 3/4"	90"							
NZ108B	97 1/4"		108"								